


Specifications

	T545/T540	T425/T420	T205
Frequency Response	40 Hz- 18 kHz	70 Hz- 18 kHz	90 Hz- 18 kHz
Power Capacity ¹	100 W	75 W	60 W
Nominal Impedance	4 Ω	4 Ω	4 Ω
Sensitivity ²	92 dB	90 dB	88 dB
Flux Density (Low Frequency)	0.95 tesla (9,500 gauss)	1.19 tesla (11,900 gauss)	1.0 tesla (10,000 gauss)
Mounting Depth	4 ¹ / ₁₆ in (110 mm)	2 ³ / ₁₆ in (56 mm)	1 ¹ / ₁₆ in (46 mm)
Mounting Cutout	Std. 6 in x 9 in (152 mm x 229 mm)	4 ¹ / ₁₆ in (122 mm) ³	4 ¹ / ₁₆ in (105 mm)
Magnetic Structure Weight	4 lb (1.8 kg)	2.3 lb (1 kg)	1.6 lb (0.7 kg)
Front Clearance	7 ¹ / ₂ in x 10 ¹ / ₂ in x 1 ¹ / ₂ in H (191 mm x 264 mm x 41 mm H) (T540—35 mm H)	6 ¹ / ₂ in x 6 ¹ / ₂ in x 1 ¹ / ₂ in H (165 mm x 165 mm x 41 mm H) (T420—35 mm H)	5 ¹ / ₂ in x 5 ¹ / ₂ in x 1 in H (146 mm x 146 mm x 25 mm H)
Accessory Grille Dimensions	9 in x 7 in x 1 ¹ / ₂ in H (229 mm x 178 mm x 29 mm H)	—	—
Net Weight (each speaker) ³	6 lb (2.7 kg)	4 lb (1.8 kg)	2 ¹ / ₂ lb (1 kg)

	2105H	LE8T-H	115H	LE10H-1
Nominal Diameter	5 in (130 mm)	8 in (200 mm)	6 ¹ / ₂ in (165 mm)	10 in (250 mm)
Impedance	8 Ω	8 Ω	8 Ω	8 Ω
Power Capacity	50 W	50 W	50 W	150 W
Sensitivity ²	94 dB	89 dB	89 dB	89 dB
Frequency Response	500 Hz- 15 kHz	35 Hz- 15 kHz	60 Hz- 3.5 kHz	30 Hz- 3 kHz
Flux Density	1.35 tesla (13,500 gauss)	0.85 tesla (8,500 gauss)	0.95 tesla (9,500 gauss)	1.02 tesla (10,200 gauss)
Mounting Depth	1 ¹ / ₄ in (45 mm)	3 ¹ / ₈ in (98 mm)	2 ¹ / ₂ in (64 mm)	4 ¹ / ₁₆ in (112 mm)
Mounting Cutout	4 ³ / ₁₆ in (107 mm)	7 in (178 mm)	5 ¹ / ₄ in (146 mm)	9 in (229 mm)
Magnetic Structure Weight	1 ¹ / ₂ lb (0.74 kg)	6 lb (2.8 kg)	3 lb (1.3 kg)	10 ¹ / ₄ lb (4.7 kg)

	T115	T105
Frequency Response	100 Hz- 20 kHz	120 Hz- 20 kHz
Power Capacity	15 W	15 W
Nominal Impedance	4 Ω	4 Ω
Sensitivity ²	88 dB	85 dB
Flux Density	0.92 tesla (9,200 gauss)	0.78 tesla (7,800 gauss)
Mounting Depth	1 ¹ / ₁₆ in (46 mm)	1 ¹ / ₁₆ in (36 mm)
Mounting Cutout	Std. 4 in x 6 in	Std. 3 ¹ / ₂ in
Magnetic Structure Weight	17.7 oz (500 g)	8.5 oz (240 g)
Net Weight	1 lb 3 oz (538 g)	9 oz (255 g)

	LT-1
Power Handling	50 W continuous, 100 W peak
Sensitivity	87 dB SPL, 2.38 V at 1 meter
Impedance	4 Ω
Frequency Response	100 Hz- 20 kHz
Enclosure Dimensions	9 ¹ / ₂ in x 6 ¹ / ₄ in x 5 in D (244 mm x 159 mm x 127 mm D)
Bracket Length	10 in (254 mm)

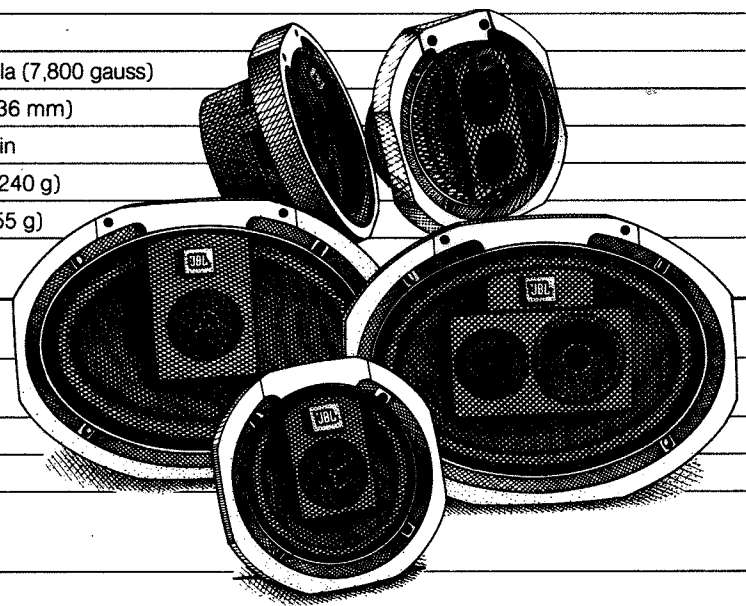

¹IEC shaped pink noise, 2 hours. ²SPL measured at 1 meter (3.3 ft) with a 1-watt input. ³Fits standard 5-inch cutouts.