

## Key Features

- ▶ Design goal: To bring the thrill of live performance and cinema sound to the small room and home environments by calling on JBL's professional engineering leadership.
- ▶ Pure titanium high frequency drivers in diopoloito array.
- ▶ Cast aluminum 5.25" woofer.
- ▶ FreeFlow™ flared rear port.
- ▶ Reduced depth for narrow applications.
- ▶ THX ultra certified.

## Description

- ▶ Horizontal front left, center, right loudspeaker.

## Frequency Response

Missing



## Specifications


Frequency Response	70Hz – 20KHz
Sensitivity	87dB @ 2.83 Volts/1 Meter
Recommended Maximum Amplifier Power	150 Watts
Nominal Impedance	8 Ohms
High Frequency Transducers (2)	1" Titanium Dome
Crossover Frequency	2.8 kHz
Low Frequency Transducer	5¼" High Polymer Laminate
Weight	23 lbs.
Dimensions (H x W x D)	17.5" x 10" x 8.5"
	445mm x 254mm x 216mm




SYSTEMS INTEGRATION  
SPECIALIST PRODUCTS

Quick Spec


# HT1F

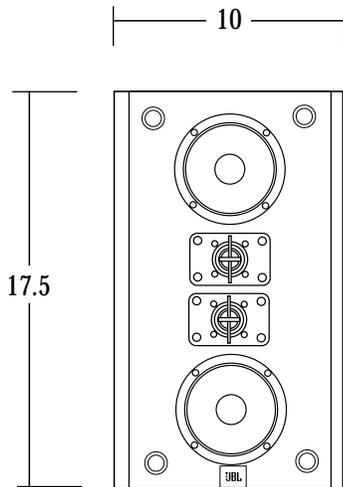


**Front**

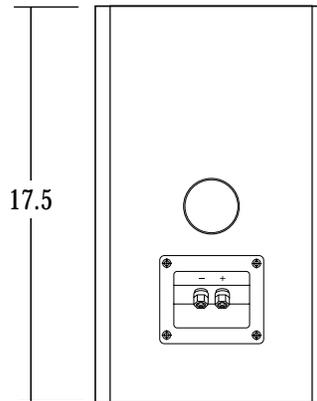


**Back**

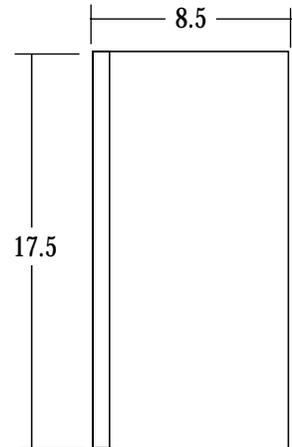

**Side**

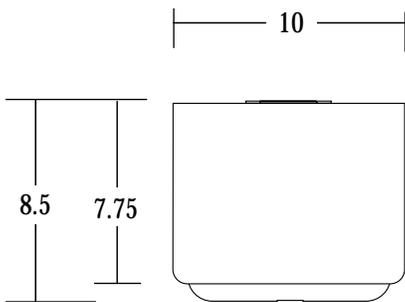

**Top**

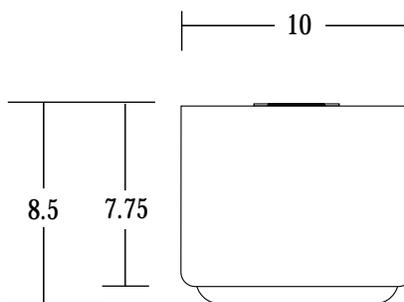

**Footprint**

All measurement in inches

**H** A Harman International Company

JBL SIS Products Group: Tel 818-830-8757 Fax 818-891-6894  
8500 Balboa Boulevard, Northridge, CA 91329  
250 Crossways Park Drive, Woodbury, NY 11797

