

Key Features

- ▶ Engineering goal: To offer the performance level, reliability and installation options of JBL loudspeakers in the media room environment.
- ▶ Smallest THX Ultra certified subwoofer, 14.6" cubed.
- ▶ Compact sealed enclosure, braced and lock mitered to eliminate unwanted vibration at more intense listening levels.
- ▶ Front firing 12" metal alloy driver, directs sound into the listening area.
- ▶ 1000 watts of power: Cool-running class D amplification allows for an abundance from this small cabinet.
- ▶ Input: THX fixed or continuously adjustable gain and crossover (50 - 150 Hz).
- ▶ RCA loop-thru to send signal to additional subwoofer.
- ▶ Signal sensing auto on/off.
- ▶ IEC power connection.
- ▶ Rubber and metal isolation feet — you choose for the right installation application.

Description


- ▶ THX 12" sealed, powered subwoofer.



Specifications

Frequency Response	28 Hz – 200 Hz (+/- 3dB)
Sensitivity	91 dB
Recommended Maximum Amplifier Power	1000 Watts, Class D
Transducer	12" Metal Alloy
Crossover Frequency	Variable 50 Hz – 105 Hz
	THX – Bypassed
Weight	68 lbs / 30.6 kg
Dimensions (H x W x D)	14.63" x 14.63" x 14.63"
	359mm x 359mm x 359mm

Frequency Response

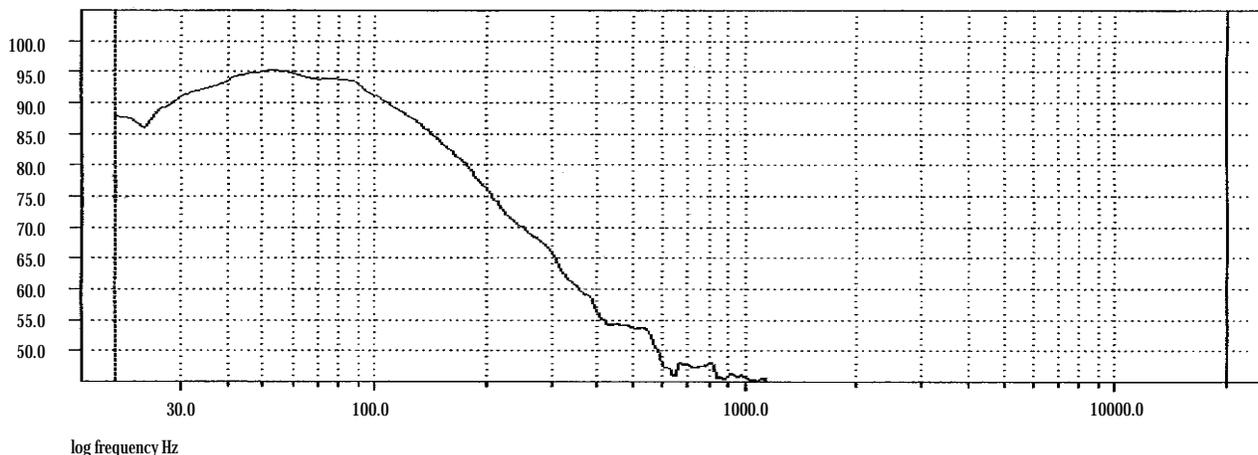





SYSTEMS INTEGRATION
SPECIALIST PRODUCTS

Quick Spec


HTPS400

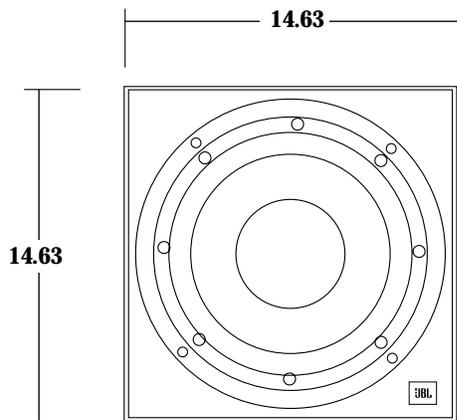


Front

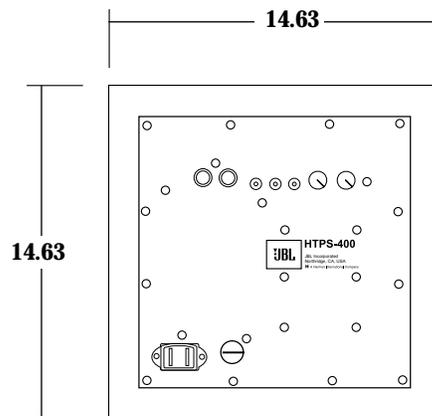


Back

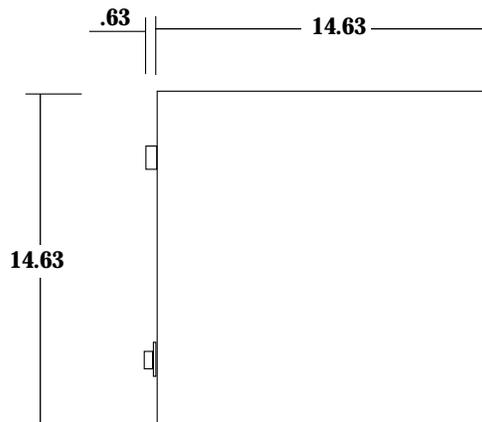

Side

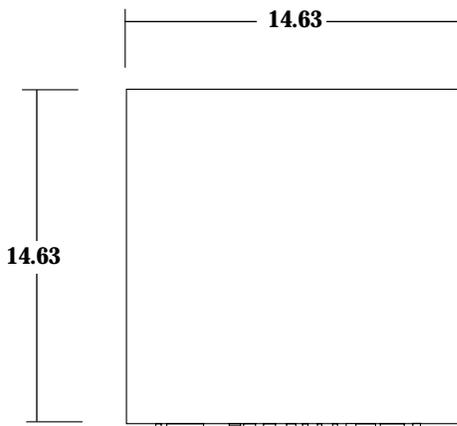

Top

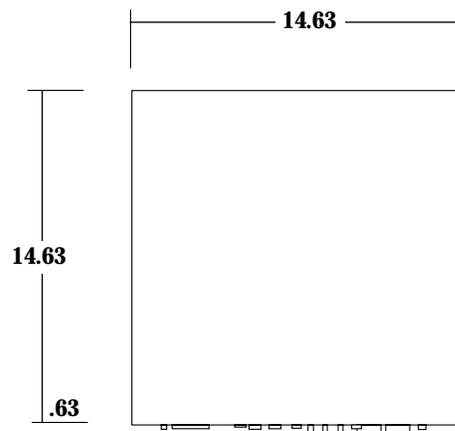

Footprint

All measurement in inches

H A Harman International Company

JBL SIS Products Group: Tel 818-830-8757 Fax 818-891-6894
8500 Balboa Boulevard, Northridge, CA 91329
250 Crossways Park Drive, Woodbury, NY 11797

pairs

