



Designed and Engineered  
in the USA

THE OFFICIAL BRAND  
OF LIVE MUSIC.



owner's manual  
subwoofer enclosures  
**GT01204BR**  
**GT01204BP-D**  
**GT01204BP**  
**GRAND TOURING**  
**SERIES**

A valid serial number is required for warranty coverage.  
Features, specifications and appearance are subject to change without notice.  
This product is designed for mobile applications and is not intended for connection to the mains.  
JBL, Incorporated • 2 route de Tours, 72500 Château du Loir, France • www.jbl.com  
© 2006 Harman International Industries, Incorporated. All rights reserved. Part No. GT01204BRBDD004/06  
JBL, Harman International and Grand Touring are trademarks of Harman International Industries, Incorporated,  
registered in the United States and/or other countries.  
**H** A Harman International® Company

Declaration of Conformity

**CE**

We, Harman Consumer Group International  
2, route de Tours  
72500 Château du Loir  
France

declare in own responsibility that the products described in this owner's manual  
are in compliance with technical standards:

EN 61000-6-3:2001  
EN 61000-6-1:2001

Klaus Leberherz  
Harman Consumer Group International  
Château du Loir, France 4/06



www.jbl.com

**SPECIFICATIONS**

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.

	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.

**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.





	<b>GT01204BP</b>	<b>GT01204BP-D</b>	<b>GT01204BR</b>
Power Handling, RMS	300W	600W	300W
Power Handling, Peak	1200W	1800W	1200W
Frequency Response	30Hz – 150Hz	35Hz – 150Hz	35Hz – 300Hz
Impedance	4 Ohms	2 x 4 Ohms	4 Ohms

**GENERAL CARE**  
The loudspeaker grilles may be cleaned with a damp cloth.  
Do not use any cleaners or solvents on the grilles or the speaker cones.






**WARRANTY**  
GTO enclosures are warranted against defects. The duration of the enclosure's warranty depends on the laws in the country in which it was purchased. Your local JBL car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.jbl.com.



**GTO1204BP**

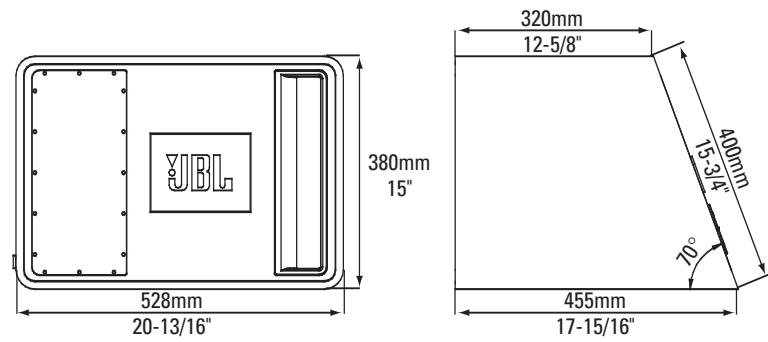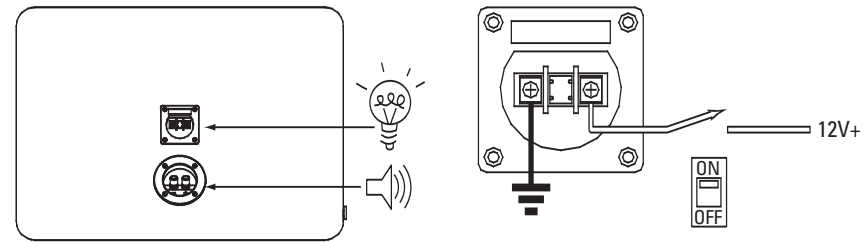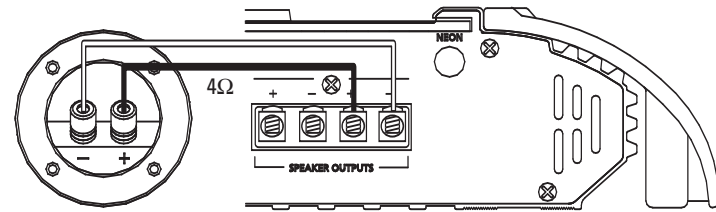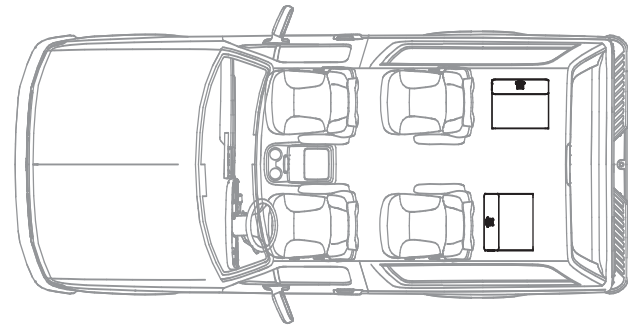

**GTO1204BP-D**

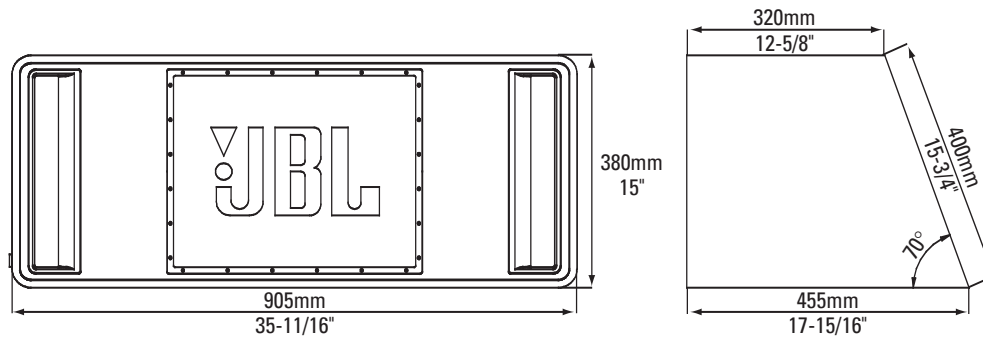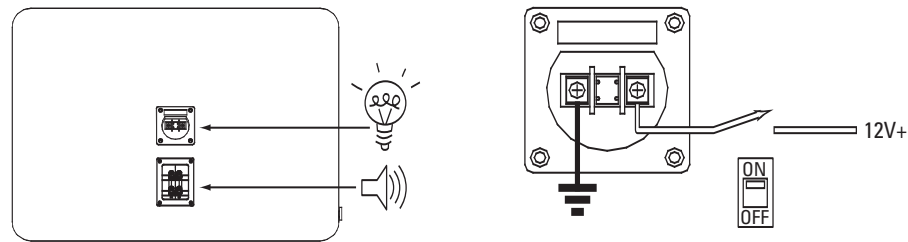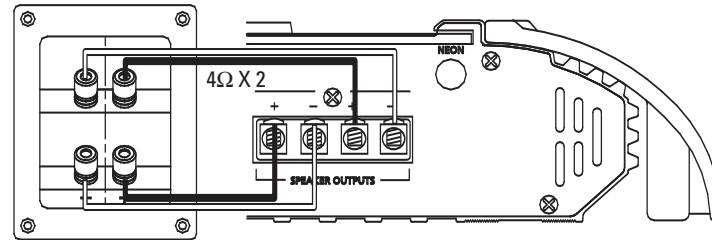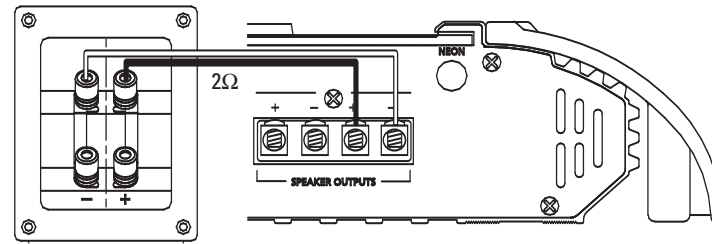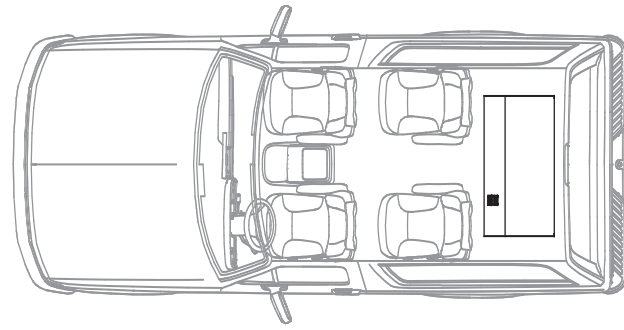

**GTO1204BR**

