



Key Features

- ▶ Design goal: To bring the thrill of live performance and cinema sound to the small room and home environments by calling on JBL's professional engineering leadership.
- ▶ Pure titanium high frequency driver.
- ▶ Bi-radial constant directivity horn – 120°.
- ▶ Cast aluminum 5.25" woofers with Heat-Scape™ motor structure.
- ▶ Straight-Line Single Path™ (SSP) crossover network.
- ▶ FreeFlow™ flared rear port.
- ▶ THX ultra certified.



Description

- ▶ Horizontal front left, center, right loudspeaker.

Specifications

Frequency Response	80Hz – 18KHz (+/- 2dB)
Sensitivity	89dB @ 2.83 Volts/1 Meter
Recommended Maximum Amplifier Power	150 Watts
Nominal Impedance	8 Ohms
High Frequency Transducer	1" Titanium Dome with Bi-Radial Horn
Crossover Frequency	1250Hz
Low Frequency Transducer	5¼"
Weight	25 lbs. / 11.4 kg
Dimensions (H x W x D)	20" x 6 ¹³ / ₁₆ " x 11 ¹ / ₈ "
	508mm x 173mm x 283mm

Frequency Response



H A Harman International Company

JBL SIS Products Group: Tel 818-830-8757 Fax 818-891-6894
8500 Balboa Boulevard, Northridge, CA 91329
250 Crossways Park Drive, Woodbury, NY 11797







SYSTEMS INTEGRATION
SPECIALIST PRODUCTS

Quick Spec


HT4V

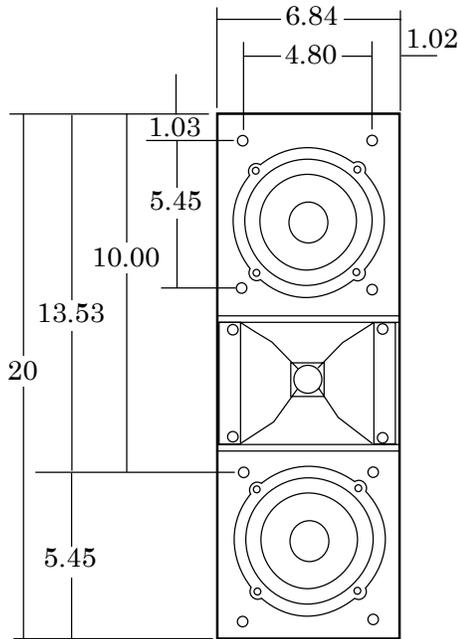


Front

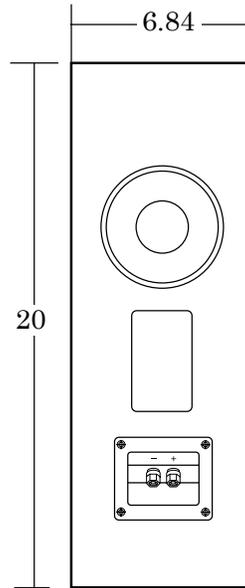


Back

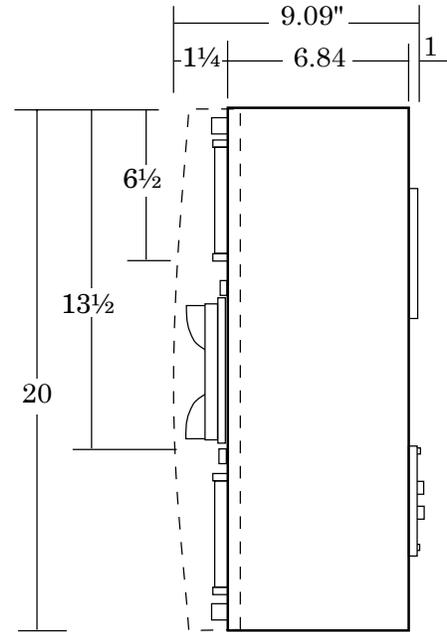

Side

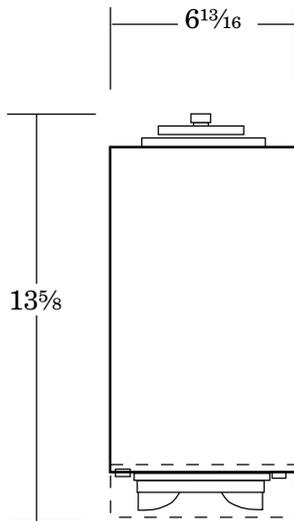

Top

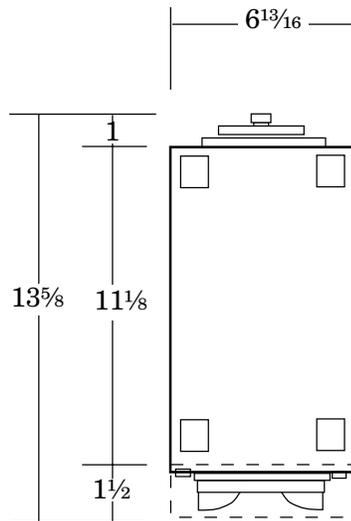

Footprint

All measurement in inches

H A Harman International Company

JBL SIS Products Group: Tel 818-830-8757 Fax 818-891-6894
8500 Balboa Boulevard, Northridge, CA 91329
250 Crossways Park Drive, Woodbury, NY 11797

